

# MARCO SINGLE ROW TERMINAL BLOCKS

## SERIES 2000 AND H2000 HIGH BARRIER

UL Recognized

UL File No. E82890



CSA #LR57186-1

CSA Approved



**2000  
SERIES**

**H2000  
SERIES**

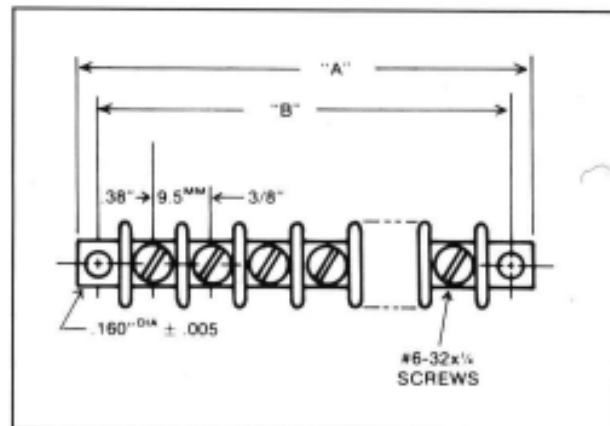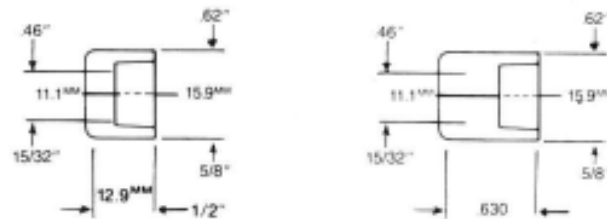

No. of Terminals	Fraction Dimension		Decimal Dimension		Millimeters Dimension	
	A	B	A	B	A	B
-2	1 <sup>13</sup> / <sub>32</sub>	1 <sup>1</sup> / <sub>8</sub>	1.41	1.13	35.7	28.6
-3	1 <sup>25</sup> / <sub>32</sub>	1 <sup>1</sup> / <sub>2</sub>	1.78	1.50	45.2	38.1
-4	2 <sup>5</sup> / <sub>32</sub>	1 <sup>7</sup> / <sub>8</sub>	2.16	1.88	54.7	47.6
-5	2 <sup>17</sup> / <sub>32</sub>	2 <sup>1</sup> / <sub>4</sub>	2.53	2.25	64.3	57.2
-6	2 <sup>29</sup> / <sub>32</sub>	2 <sup>5</sup> / <sub>8</sub>	2.91	2.63	73.8	66.7
-7	3 <sup>1</sup> / <sub>32</sub>	3	3.28	3.00	83.3	76.2
-8	3 <sup>13</sup> / <sub>32</sub>	3 <sup>3</sup> / <sub>8</sub>	3.66	3.38	92.8	85.7
-9	4 <sup>1</sup> / <sub>32</sub>	3 <sup>7</sup> / <sub>8</sub>	4.03	3.75	102.4	95.3
-10	4 <sup>13</sup> / <sub>32</sub>	4 <sup>1</sup> / <sub>8</sub>	4.41	4.13	111.9	104.8
-11	4 <sup>25</sup> / <sub>32</sub>	4 <sup>1</sup> / <sub>2</sub>	4.78	4.50	121.4	114.3
-12	5 <sup>5</sup> / <sub>32</sub>	4 <sup>5</sup> / <sub>8</sub>	5.16	4.88	130.9	123.8
-13	5 <sup>17</sup> / <sub>32</sub>	5 <sup>1</sup> / <sub>4</sub>	5.53	5.25	140.5	133.4
-14	5 <sup>29</sup> / <sub>32</sub>	5 <sup>3</sup> / <sub>8</sub>	5.91	5.63	150	142.9
-15	6 <sup>1</sup> / <sub>32</sub>	6	6.28	6.00	159.5	152.4
-16	6 <sup>13</sup> / <sub>32</sub>	6 <sup>3</sup> / <sub>8</sub>	6.66	6.38	169	161.9
-17	7 <sup>1</sup> / <sub>32</sub>	6 <sup>7</sup> / <sub>8</sub>	7.03	6.75	178.5	171.5
-18	7 <sup>13</sup> / <sub>32</sub>	7 <sup>1</sup> / <sub>8</sub>	7.41	7.13	188	181
-19	7 <sup>25</sup> / <sub>32</sub>	7 <sup>1</sup> / <sub>2</sub>	7.78	7.50	197.6	190.1
-20	8 <sup>1</sup> / <sub>32</sub>	7 <sup>5</sup> / <sub>8</sub>	8.16	7.88	207.1	200
-21	8 <sup>13</sup> / <sub>32</sub>	8 <sup>1</sup> / <sub>4</sub>	8.53	8.25	216.7	209.6
-22	8 <sup>25</sup> / <sub>32</sub>	8 <sup>3</sup> / <sub>8</sub>	8.91	8.63	226.2	219.1
-23	9 <sup>1</sup> / <sub>32</sub>	9	9.28	9.00	235.7	228.6
-24	9 <sup>13</sup> / <sub>32</sub>	9 <sup>1</sup> / <sub>8</sub>	9.66	9.38	245.2	238.1
-25	10 <sup>1</sup> / <sub>32</sub>	9 <sup>5</sup> / <sub>8</sub>	10.03	9.75	254.8	247.7
-26	10 <sup>13</sup> / <sub>32</sub>	10 <sup>1</sup> / <sub>8</sub>	10.41	10.13	264.3	257.2
-27	10 <sup>25</sup> / <sub>32</sub>	10 <sup>1</sup> / <sub>2</sub>	10.78	10.50	273.8	266.7
-28	11 <sup>5</sup> / <sub>32</sub>	10 <sup>3</sup> / <sub>8</sub>	11.16	10.88	283.3	276.2
-29	11 <sup>17</sup> / <sub>32</sub>	11 <sup>1</sup> / <sub>4</sub>	11.53	11.25	292.9	285.8
-30	11 <sup>29</sup> / <sub>32</sub>	11 <sup>3</sup> / <sub>8</sub>	11.91	11.63	302.4	295.3

**SPECS.**

CONSTRUCTION

TERMINAL CENTERS

CURRENT RATING, AMPS (UL)

VOLTAGE RATING, rms

(A) UL RECOGNIZED

1. GENERAL INDUSTRIAL

2. COMMERCIAL EQUIP.

(B) WITHSTAND AND VOLTS, rms

MATERIAL

WIRE SIZE RECOMMENDED

SCREWS

# OF TERMINALS

NOTE: B Dimension ± .015

NOTE: OUR TERMINALS ARE ULTRASONICALLY WELDED IN THE BLOCK FOR IMPROVED PULL OUT STRENGTH.

CLOSED BACK OR FEED THRU

3/8" (9.5mm)

20

150-300

250

7500

(THERMOPLASTIC) (COLOR BLACK)

14-22 AWG SOLID/STRANDED

5/32 x 1/4 BINDING HEAD

STEEL NICKEL PLATED

1-30

TOP HARDWARE OPTIONAL OUR QC SERIES

(UL FLAME RETARDANT RATING 94V-0)

**MARKER STRIPS AVAILABLE SEE MARKER STRIP INSERT**