



3/8 CENTER CLOSE BACK DOUBLE ROW PHONELIC TERMINAL BLOCK

SERIES: 440




CONSTRUCTION: CLOSED BACK , FEED -THRU
TERMINAL CENTERS: .375 (3/8")
MATERIAL: G.P. PHONELIC COLOR: BLACK OR GRAY
CURRENT RATING: 20 AMPS
VOLTAGE: 300 VOLTS
RECOMMENDED WIRE SIZE: 14-22 AGW
SCREW TYPE: 6/32 STEEL COMBO HEAD (PHILLIP/ SLOT)
 (BRASS SCREW OPTIONAL)
UL FLAME RETARDANT RATING 94V-0
**ALL TERMINALS ARE BRASS NICKEL PLATED AND
 ARE MOLDED INTO THE TERMINAL BLOCK**

ORDERING INFO: 440
440: Represents Block Series
Second two digits: Represents # Of Terminals

DIMENSIONS					
NUMBER OF TERM	A		NUMBER OF TERM	B	
	A	B		A	B
-02	1.43	1.13	-17	7.06	6.75
-03	1.80	1.50	-18	7.43	7.13
-04	2.17	1.88	-19	7.83	7.50
-05	2.56	2.25	-20	8.20	7.88
-06	2.93	2.63	-21	8.57	8.25
-07	3.31	3.00	-22	8.95	8.63
-08	3.68	3.38	-23	9.32	9.00
-09	4.06	3.76	-24	9.70	9.38
-10	4.43	4.13	-25	10.07	9.75
-11	4.81	4.50	-26	10.45	10.15
-12	5.18	4.88	-27	10.82	10.53
-13	5.56	5.25	-28	11.21	10.90
-14	5.93	5.63	-29	11.59	11.28
-15	6.31	6.00	-30	11.96	11.67
-16	6.68	6.38	-31	12.35	12.03

A Dimension +/- .015

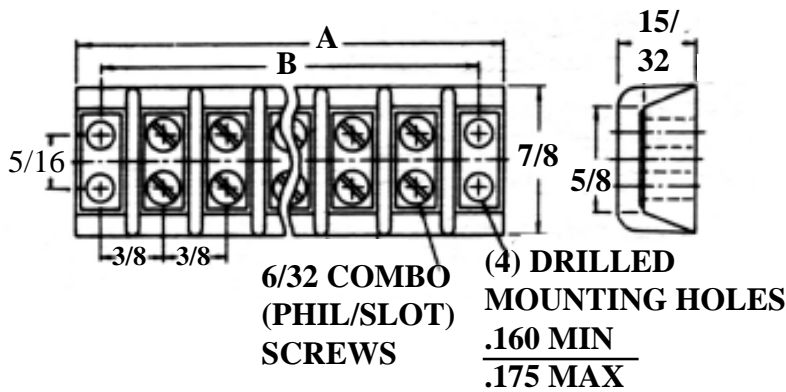

**FOR TOP HARDWARE OPTION
 SEE MARCO QC TABS (QUICK
 CONNECT TABS)**

**FOR BOTTOM OPTIONS (SY, LY
 SOLDER LUGS SEE HARDWARE
 OPTIONS)**

**FOR MARKER STRIPS SEE
 MARKER STRIPS SECTION**