

# MARCO 600 SERIES

## 3/8" CENTERS 300 VOLT 20AMP


STEEL NICKEL-PLATED SCREWS

**FLEXIBLE THERMOPLASTIC MOLDING**

- Break resistant
- Flame retardant UL94V-0.

**SOLDER PAD**

- Permits easy defluxeing
- Reduces heat absorption during wave soldering.

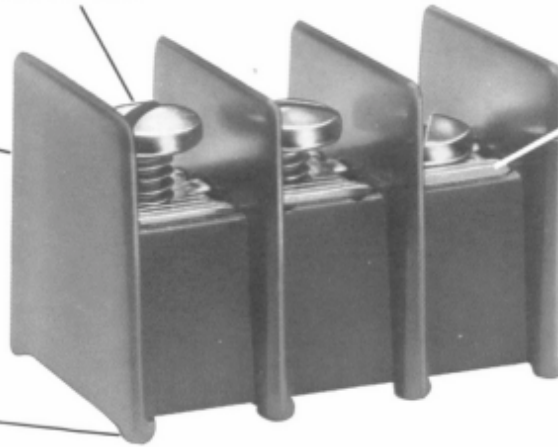


**SERRATED & UPTURNED CONNECTOR**


- Prevents pull-out

**WIDE BARRIERS**

- For 300 volt rating on 3/8" centers.




Barrier End

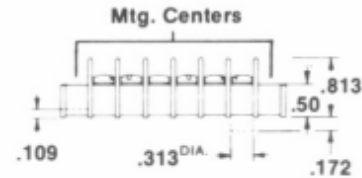


Mount End

NO. OF CIRCUITS	DIMENSIONS		NO. OF CIRCUITS	DIMENSIONS		NO. OF CIRCUITS	DIMENSIONS		NO. OF CIRCUITS	DIMENSIONS	
	BARRIER END	MOUNT END (MTG. CENTERS)		BARRIER END	MOUNT END (MTG. CENTERS)		BARRIER END	MOUNT END (MTG. CENTERS)		BARRIER END	MOUNT END (MTG. CENTERS)
1	.44	.75	9	3.44	3.75	17	6.44	6.75	25	9.44	9.75
2	.81	1.12	10	3.81	4.13	18	6.81	7.13	26	9.81	10.13
3	1.19	1.50	11	4.19	4.50	19	7.19	7.50	27	10.19	10.50
4	1.56	1.88	12	4.56	4.88	20	7.56	7.88	28	10.56	10.88
5	1.94	2.25	13	4.94	5.25	21	7.94	8.25	29	10.94	11.25
6	2.31	2.63	14	5.31	5.63	22	8.31	8.63	30	11.31	11.63
7	2.69	3.00	15	5.69	6.00	23	8.69	9.00	31	11.69	—
8	3.06	3.38	16	6.06	6.38	24	9.06	9.36	32	12.06	—

### BOTTOM HARDWARE OPTIONS

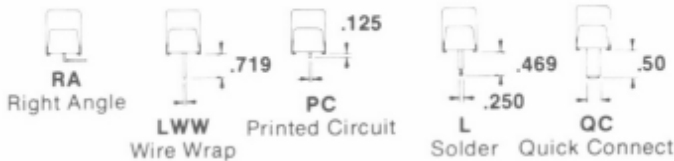

### BASE STYLES MTG. STYLES

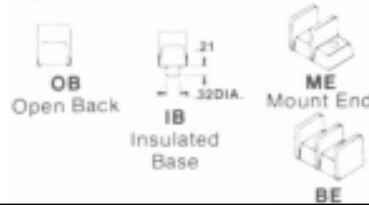


### SPECIFICATIONS

**Connectors:** \*Nickel Plated  
**Screws Available:** \*Brass Nickel Plate, 6/32 Binder Head  
**Molding:** Nylon UL 94V-0 Flammability Rating

### Top Hardware options



### PIN CROSS SECTION



No. of Terminals  
Series No.

### ORDERING CODE



Top Hardware Modification

Bottom Hardware Modification (When no bottom hardware is required, insert NF in this space.)